






Information Screen controlling machine functions and reporting output and efficiency figures.



Chamber sides open for easy cleaning and fast tool-less size change.



Gutters and Drains to catch any ingressing liquids.



Emergency Stop buttons mounted on both sides.



Breaked Castors, ensuring secure footing while working and easy movement when required.




Water resistant electrical cabinet.



Simple manifold mounted pneumatic cabinet for easy maintenance.



Cam Tube Location System allowing for easy location of slightly bent tubes.



Swan Neck cable system to eliminate water ingress.

OPTIONS

AWI Automatic Water Injection

Injects a fine spray of water into each chamber each cycle to allow easy movement of dry products such as pork.

SSL Selectable Stroke Length

Allows shortening of piston strokes, to optimise shape.

APH Automatic Piston Hold

Pausing the piston in its outward position, to allow further shaping of the product.

Available in all sizes from 75 – 200 mm

EH version available for tube sizes up to 250 mm



TECHNICAL INFORMATION

Speed

The machine will cycle at over 1200 units per hour.
Production speeds will depend on the product
and the input and output flow to the machine.

Weight

Approximately 400 kg

Services

Compressed Air

Pressure: 80 psi or 5.5 BAR





Flow: 46 ft³ or 1320 litres per minute

Electrical

230 V, Single phase, 5 amp supply

Packing Crate Dimensions

Length 2590 mm x Width 1160 mm x Height 1550 mm

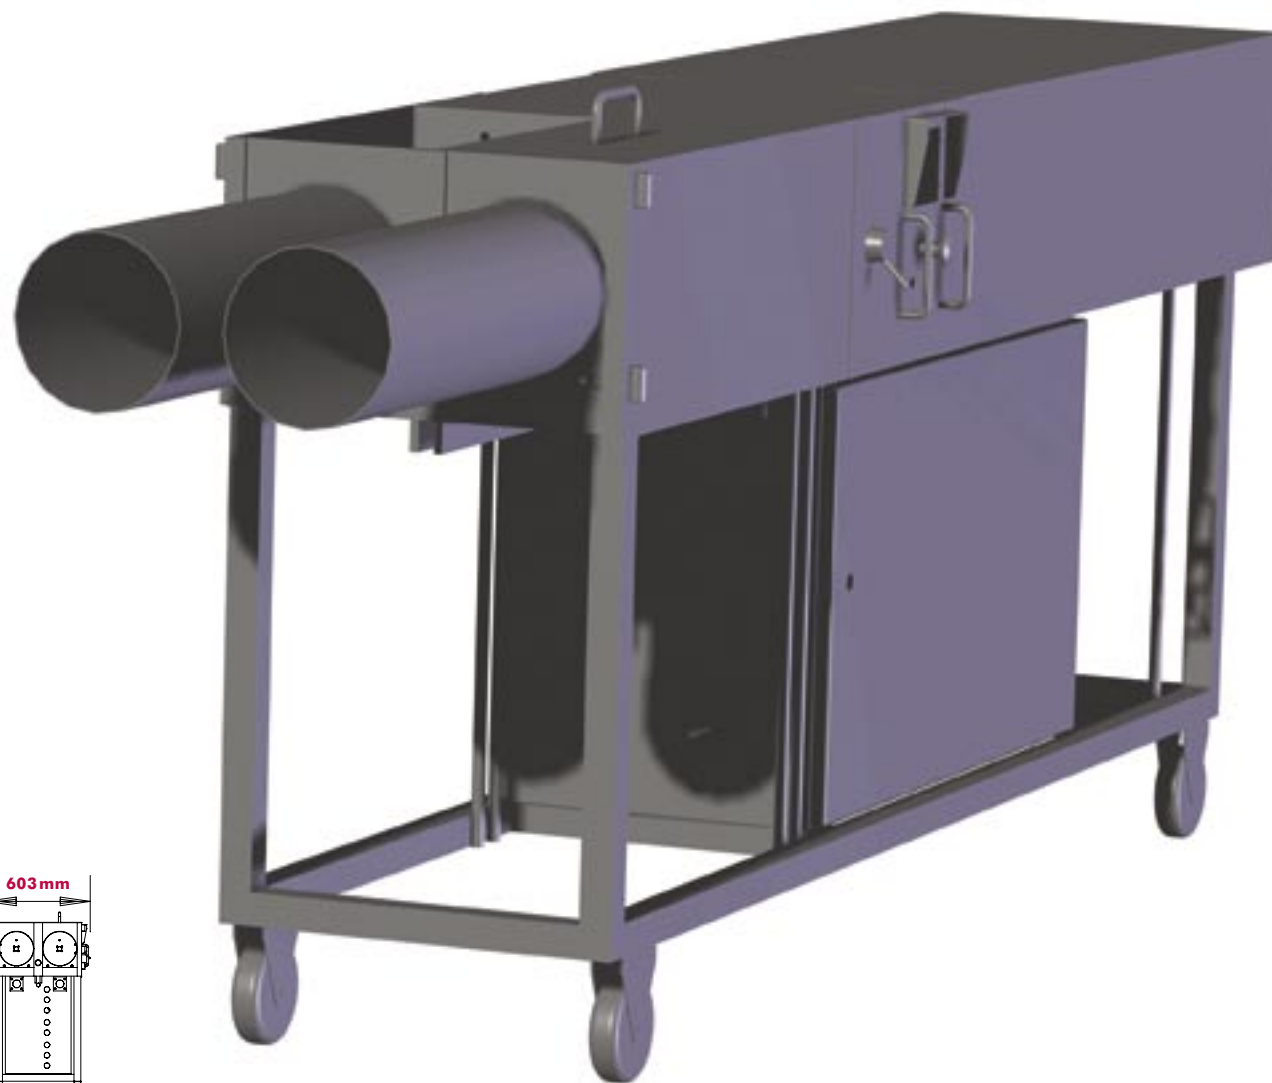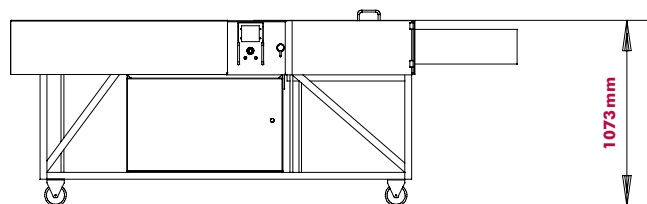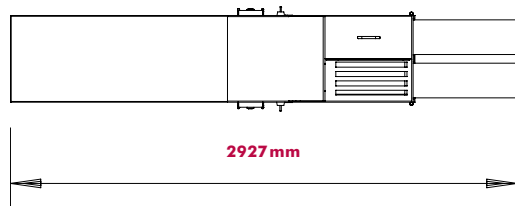

Please note: dimensions are subject to change without notice.



600mm Netting Tube

A typical user of 1000m of net per day can
¼ the number of tube changes per day.



Fully welded joints, removing bug traps.



P₆ Pistons – are made from Stainless Steel.



P₆ Chambers have a fully enclosed design
for easy cleaning.



All the accessories are permanently
marked with their size for easy
identification.



Integrated handle for easy removal.

Available in all sizes from 75 – 200 mm
EH Model Available for 150 – 250 mm